

Sartaj 4 Tyre Truck Series

SML
ISUZU

Augment your Profits



SARTAJ HG72
GVW - 7200 Kgs.

SARTAJ 59 XM
GVW - 5990 Kgs.

SARTAJ 5252 XM
GVW - 5200 / 4990 Kgs.



MORE CARGO SPACE

POWERFUL ENGINE

FUEL EFFICIENT

LOW MAINTENANCE

MULTI PURPOSE LCVs

Trucks & Buses

SPECIFICATIONS



	Sartaj HG 72	Sartaj 59 xm	Sartaj 5252 xm
Engine			
Description	BS-III SLT HT3 / BS-IV SLT4	BS-III SLT HT3 / BS-IV SLT4	BS-III SLT HT3 / BS-IV SLT4
Displacement (cc)	3455	3455	3455
Engine Type	4-Cylinder In-line Direct Injection / Common Rail Direct Injection Diesel Turbo-charger with Inter-cooler	4-Cylinder In-line Direct Injection / Common Rail Direct Injection Diesel Turbo-charger with Inter-cooler	4-Cylinder In-line Direct Injection / Common Rail Direct Injection Diesel Turbo-charger with Inter-cooler
Performance			
Engine Output (Max.)	75 kw @ 3000 rpm / 75 kw @ 2800 rpm	75 kw @ 3000 rpm / 75 kw @ 2800 rpm	75 kw @ 3000 rpm / 75 kw @ 2800 rpm
Torque (Max.)	315 Nm @ 1500-1700 rpm / 296 Nm @ 1500 rpm ± 50	315 Nm @ 1500-1700 rpm / 296 Nm @ 1500 rpm ± 50	315 Nm @ 1500-1700 rpm / 296 Nm @ 1500 rpm ± 50
Transmission			
Gear Box	Synchromesh Manual 5 - Forward & 1 - Reverse	Synchromesh Manual 5 - Forward & 1 - Reverse	Synchromesh Manual 5 - Forward & 1 - Reverse
Clutch	Single Plate Diaphragm (260 mm Diameter)	Single Plate Diaphragm (260 mm Diameter)	Single Plate Diaphragm (260 mm Diameter)
Brake	Vacuum Assisted Hydraulic	Vacuum Assisted Hydraulic	Vacuum Assisted Hydraulic
Suspension	Semi-elliptical with Multi-Leaf Spring	Semi-elliptical with Multi-Leaf Spring	Semi-elliptical with Multi-Leaf Spring
Tyre / No. of Tyres	8.25' x 16' - 16 PR / 4 +1	8.25' x 16' - 16 PR / 4 +1	7' x 16' - 14 PR / 4 +1
Steering			
Mechanical/Power	Optional	Optional	Optional
Turning Circle Diameter (minimum) (m)	12.5	11	10.15
Wheel Base (mm)	3335	2815	2515
Gross Vehicle Weight (Max. Permissible) (kg)	7200	5990	4990/5200
Load Body Type	<i>Dimensions (l x b x h) (mm)</i>		
Cab Fixed Deck	4260 / 3740 x 2080 x 580	3510 x 1880 x 580	2800 x 1860 x 400
Cab Semi Deck	4260 / 3740 x 2080 x 1030	-	2800 x 1860 x 1030
Cab High Deck	4260 / 3740 x 2080 x 1695	3510 x 1880 x 1695	2800 x 1860 x 1695
Load Span (ft.)	14' / 12.25'	11.5'	9.1'
Cabin Chassis	Available	Available	Available

Note : Specifications are subject to change without any prior notification, as per the company policy of continuous improvement of products and service.

Features

- Available in BS-III & BS-IV Versions
- Powerful Engine - Higher Pickup, Higher Torque at lower RPM, Gradeability and Fuel Efficiency
- Heavy Duty Gear Box and Bigger Clutch - Longer Life
- Box Type Chassis with tubular cross members - carry more load, provide better Strength and Rigidity
- Steering with variable Gear Ratio - Less Driver Fatigue
- Roof Ventilation option available in Sartaj HG 72 variant for more comfort
- Ready availability of Spares at reasonable Price

CNG option available in select variants

Path-breaking performance that empowers your business



75 kw
Powerful
Engine for
extra
Mileage



Bigger Clutch
Plate for
More Life



Spacious
Cargo Box for
Voluminous
Goods



Robust Box Type
Chassis Ideal for
all kinds of Loads



Heavy
Duty
Axle



Higher
Gradeability



Larger
Fuel Tank



Oil
Change
on
30,000 km




Labor Free
Service
up to
52,000 km

Multi Purpose LCVs

Safe, Dependable & Perfect Partner for Your Business

Around 250 Customer Touch Points Across India

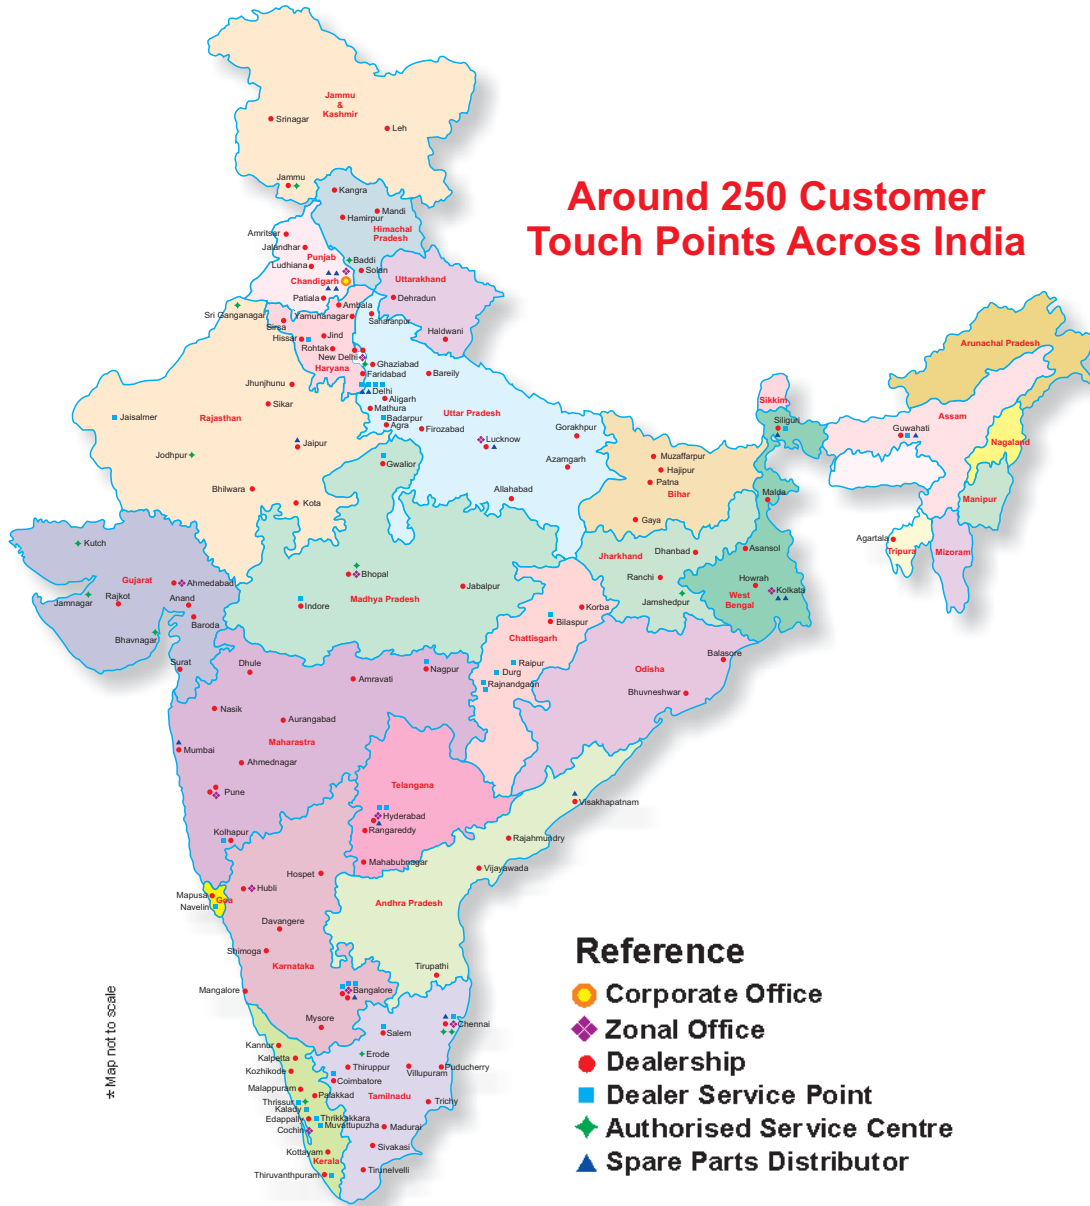

- Wide and Far Reaching Dealer Network
- Excellent Service Support
- Trustworthy and be assured that your vehicle is in the safe hands when it comes to service
- Easy Availability of Spares
- Warranty : 3 Years on Engine and 2 Years on Vehicle (or upto 1.5 Lac km whichever is earlier)
- Easy Finance Available from All Leading Banks and Financial Lending Institutions



ALWAYS USE SML ISUZU GENUINE SPARES

SML ISUZU

SML ISUZU Ltd.

S.C.O. 204 - 205, Sector 34-A, Chandigarh - 160 022.

Ph : 0172-2647700. Fax : 0172-2615111.

E-mail : salesadm@smlisuzu.com,

For more information, please visit our website : www.smlisuzu.com

Authorised Dealer :